

## DOLLE SW26-3




### **SIZE 120 X 60 - WITH 20 MM INSULATION**

DOLLE SW26-3 with 20 mm insulation is a 3-section folding attic ladder, which requires no headroom or storage space in the loft. Draught excluder contained in casing and trapdoor with 20-mm insulation prevents loss of heat and draught. Non-slip treads for extra security. Specially developed height adjustment system. Ladder assembled for easy and quick installation.

## PRODUCT DATA

PRODUCT NAME	Dolle SW26-3
TYPE	3-section
MATERIAL	wood
PRODUCT-NO.	22365
FLOORHEIGHT	Max. 280 cm
OUTLET IN CM	137,7 cm
OUTSIDE WIDTH IN CM	162 cm
NUMBER OF TREADS	12
OPENING SIZE	120x60 cm
INSULATION	20 mm
MATERIAL (CASING)	Spruce
THICKNESS (CASING)	18 mm
HEIGHT (CASING)	115 mm
OUTSIDE CASING	117,5x57,6 cm
MATERIAL (TRAPDOOR)	Brown / white HDF 2 x 3 mm
INSULATION (TRAPDOOR)	20 mm
THICKNESS (TRAPDOOR)	26 mm
THICKNESS (TREADS)	28 mm
DEPTH (TREADS)	82 mm
WIDTH (TREADS)	400 mm
RISE (TREADS)	250 mm
MATERIAL (TREADS)	Spruce
MATERIAL (STRING)	Spruce
THICKNESS (STRING)	21 mm
DEPTH (STRING)	84 mm
MAX. USERWEIGHT	Tested by EN14975 up to 265 kg, work weight 150 kg
U-VALUE W/(M²K)	1,6 tested as building component
TEST	IFT Rosenheim EN12207 Class 4 @ 600 Pa

## MEASUREMENTS

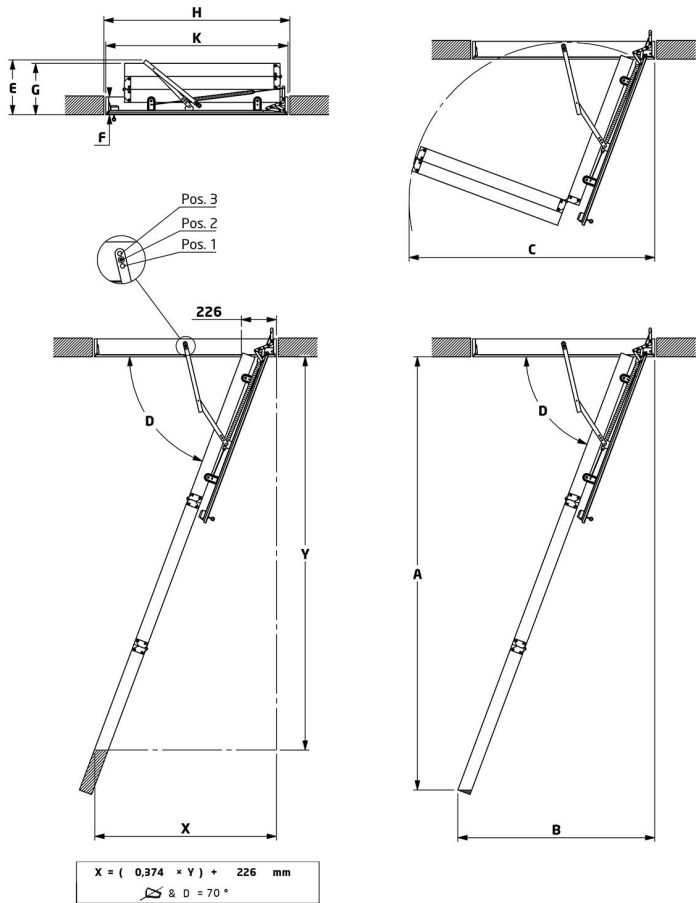

III	Pos.	A		B	C	D	E	F	G	Model	H		K	
		mm	mm								mm x mm	mm x mm		
12	4-4-4	1	2749	2783	1376	1620	67	433	115	385	22365	1200 x 600	1175 x 576	
		2	2797	2829	1271	1586	70	353			22366	1300 x 600	1275 x 576	
		3	2841	2871	1161	1551	72	173			22367	1400 x 600	1375 x 576	
											22375	1200 x 700	1175 x 676	
											22376	1300 x 700	1275 x 676	
											22377	1400 x 700	1375 x 676	