


LOFT LADDER DOLLE SW56-4

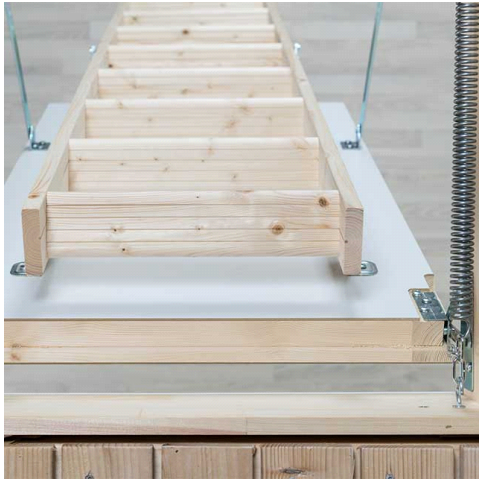

MADE TO MEASURE

LOFT LADDER DOLLE SW56-4 WITH 50 MM INSULATION

Loft ladder DOLLE SW56-4 is a 3-section folding loft ladder, which requires no headroom or storage space in the loft.

Made to measure size:

> Outside casing: L:109,5 - 157,5 x B:47,6 - 97,6 cm



> Opening size: L:112 - 160 x B: 50 - 100 cm

Outside casing length + width cannot exceed 255,1 cm

Draught excluder contained in casing and trapdoor with 50 mm insulation prevents loss of heat and draught. 8 standard sizes and special measure is possible. Nice finish with white-faced trapdoor. Non-slip treads for extra security. Specially developed height adjustment system. Casing and trapdoor with a rebate for extra tight closing. Ladder assembled for easy and quick installation.

Accessories:

Increase security - lock your loft ladder

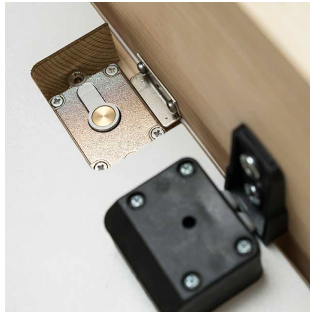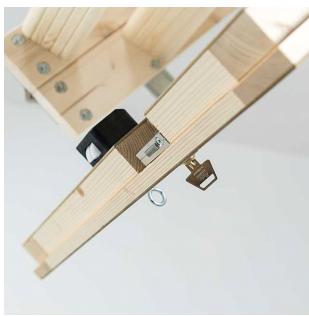

PRODUCT DATA

PRODUCT NAME	Loft Ladder DOLLE SW56-4
TYPE	3-section
MATERIAL	wood
PRODUCT-NO.	52400
FLOORHEIGHT	Max. 262 cm
HEIGHT WITH EXTRA TREADS	Max. NOT possible cm
OUTLET IN CM	140 cm
OUTSIDE WIDTH IN CM	164 cm
NUMBER OF TREADS	11-14
OPENING SIZE	special measure cm
INSULATION	50 mm
MATERIAL (CASING)	Pine
THICKNESS (CASING)	18 mm
HEIGHT (CASING)	190 mm
OUTSIDE CASING	special measure cm
MATERIAL (TRAPDOOR)	white HDF 2 x 3
INSULATION (TRAPDOOR)	50 mm
THICKNESS (TRAPDOOR)	56 mm
THICKNESS (TREADS)	28 mm
DEPTH (TREADS)	82 mm
WIDTH (TREADS)	358 mm
RISE (TREADS)	250 mm
MATERIAL (TREADS)	spruce
MATERIAL (STRING)	spruce
THICKNESS (STRING)	21 mm
DEPTH (STRING)	84 mm
MAX. HEIGHT CLOSED STAIR	36 cm
MAX. HEIGHT ARM, CLOSED STAIR CM	59,3 cm
MAX. USERWEIGHT	Tested by EN14975 up to 265 kg, work weight 150 kg
SPECIAL MEASURE	Yes
U-VALUE W/(M ² K)	0,9 tested as building component
TEST	IFT Rosenheim EN12207 Class 4